

## Technical Data Sheet

### U-E10 Shim thickness 1mm

#### COMPONENTS


The U-E10 is composed of 1 piece.

#### CHARACTERISTICS

Weight: 0,018 kg  
Diameter: 150 mm  
Thickness: 1mm

#### MATERIAL

Material: SBR  
Hardness Shore A Din 53505: 60-80 SHA  
Color: Black  
Density: 1,55 g/cm<sup>3</sup>  
Temperature range: (-30) +/- 70 °C  
Tensile Strength Din 53504: 3 Mpa  
Elongation at break DIN 53504: 250%  
Use of recycled materials exclusively of EU origin  
Resistant to weathering, sea salts, algae and a wide range of chemicals

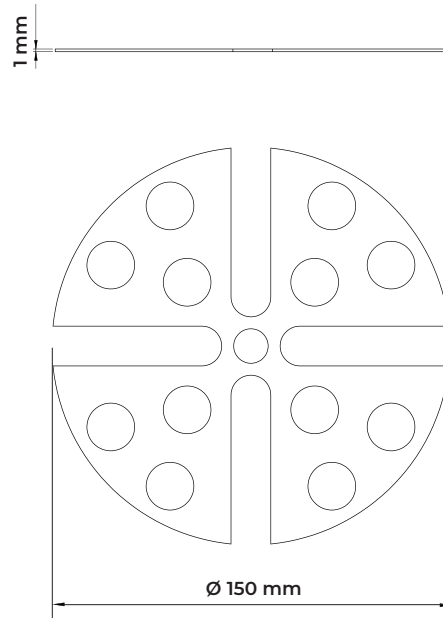

#### PACKAGING

Pieces per carton: 480 pcs  
Carton weight: 8,99 kg  
Carton dimension: 400 x 300 x 160 mm  
Cartons per pallet: 48 pcs  
Pieces per pallet: 23 040 pcs  
Pallet dimensions: 80 x 120 x 110 cm

#### APPLICATIONS

The U-E10 leveller is a 1 mm clover-shaped shim. Placed on the Buzon pedestal, it stabilises the paver, provides additional acoustic values, and because it can be split, it compensates for variations in paver thickness.

#### SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

